



VERSASNAP STANDING SEAM

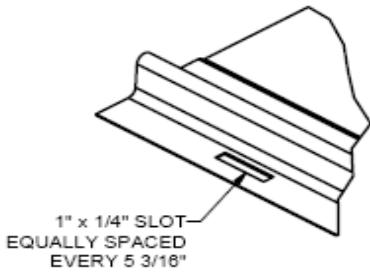

DETAIL A

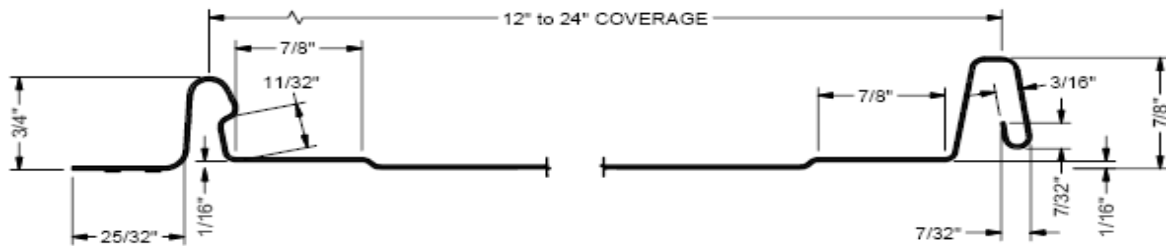

GAUGE	PANEL	SPAN IN FEET		
		1'-0"	1'-6"	2'-0"
24 GA.	12"	261	178	129
	18"	234	140	94
	24"	190	109	63
26 GA.	12"	191	115	72
	18"	131	95	66
	24"	97	67	40
		ALLOWABLE LOAD PER SQUARE FOOT**		

****ALLOWABLE LOAD (PSF) BASED ON:**

- "GRADE A" STEEL WITH A MINIMUM YIELD STRENGTH OF 33000 PSI;
- THREE SPAN CONDITION;
- DEFLECTION OF L/240

FINISHES AVAILABLE:

- A) PREFINISHED HDP SERIES (8000 SERIES, HMP SERIES)
- B) PREFINISHED KYNAR
- C) PLAIN GALVALUME
- D) WEATHERED GALVALUME
- E) PLAIN GALVANIZED

KERRIAN METALHOUSE LTD.
VERSASNAP STANDING SEAM

- 1. VERSASNAP IS ROLLFORMED USING A NEW TECH MACHINERY STANDING SEAM POWER PANEL MACHINE WITH FF100 DIES.**
- 2. VERSASNAP IS MANUFACTURED AT THE KERRIAN METALHOUSE LTD. PLANT IN ALDERGROVE, BRITISH COLUMBIA, OR AT THE PROJECT SITE.**
- 3. JOB-SPECIFIC ENGINEERING CAN BE PROVIDED BY KERRIAN METALHOUSE LTD., INCLUDING SEALING OF SHOP DRAWINGS.**